

TECNO60

113002

PC70G/6

PIANO COTTURA GAS 4 FUOCHI

4 BURNERS GAS BOILING TOP



CARATTERISTICHE TECNICHE

Costruito in acciaio inox

Utilizzabile su banco o abbinabile a vani neutri

Dotata di piedi regolabili, può essere disposta a parete o ad isola

Funzionamento a gas metano o liquido; in dotazione ugelli intercambiabili

Piano stampato con invaso antitraboccamento di liquidi

Accostabile ad altre apparecchiature attraverso appositi giunti coprifuga

Buciatori di elevata potenza dotati di termocoppia di sicurezza

Accensione piezoelettrica per ogni bruciatore

Robuste griglie in ghisa smaltata nero opaco

SPECIFICATIONS

Made of stainless steel

It can be placed on a counter or installed on a neutral base

Equipped with adjustable feet. It can be positioned by the wall or combined with other appliances as a central island.

Natural gas or LPG functioning; interchangeable nozzles are provided

Pressed top with raised edges to prevent liquids from spilling over

It can be matched with other appliances by means of special joint elements


Powerful burners equipped with safety thermocouple

Piezoelectric ignition for each burner

Sturdy enamelled cast iron grids

Disposizioni potenze sul piano

Power levels distribution on the top

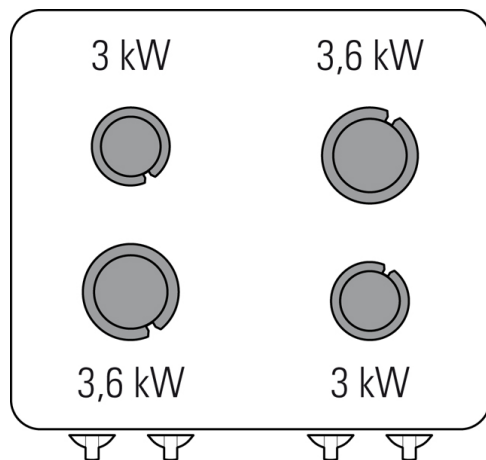

Information shown is provided only as a guide. The company reserves the right to modify these data without notifying anytime.

La validità dei dati riportati è indicativa. L'azienda si riserva il diritto di apportare, in qualsiasi momento, variazioni anche senza preavviso.



TECNOINOX S.r.l. - via Torricelli 1 - 33080 Porcia PN - Italy
tel.: +39.0434.920110 - fax: +39.0434.920422
www.tecnoinox.it - tecnoinox@tecnoinox.it





DATI TECNICI - TECHNICAL SHEET

| | U.M. | |
|--|--------|--|
| Total Power | kW | 13,2 |
| Gas Power | kW | 13,2 |
| Open Burners Power | n°x kW | 2x3 + 2x3,6 |
| Top Power | kW | 13,2 |
| Natural Gas Consumption | m³/h | 1,39 |
| Number of Burners | n° | 4 |
| Pan Holders | | Ghisa Smalto RAAF-RAAF Enam. Cast Iron |
| CE Certificate Nr. (Gas Appliance) | | CE-0085AQ1145 |
| Gas Supply Height from Ground/Position | | Fondo-Bottom |
| Gas Connection Diameter | | 1/2"G EN10226-1 |
| | mm | 0 |
| | mm | 655 |
| | mm | -100 |
| | mm | 51 |
| | | 3 |
| Width | cm | 70 |
| Depth | cm | 60 |
| Height | cm | 30 |
| Packaging Width | cm | 76,0 |
| Packaging Depth | cm | 71,0 |
| Packaging Height | cm | 53,0 |
| Net Weight | kg | 21,5000 |
| Gross Weight | kg | 27,0000 |
| Volume | m³ | 0,2900 |
| S.H. Codes | | 84198180 |
| Maximum weight for stacking | kg | 500 |
| Parcel Rotation Index | | Orizzontale |
| Testing Sequence | | 90001 |
| | | 173,174,177 |