

TECNO60

113003

PC105G/6

PIANO COTTURA GAS 6 FUOCHI

6 BURNERS GAS BOILING TOP



CARATTERISTICHE TECNICHE


Costruito in acciaio inox
Utilizzabile su banco o abbinabile a vani neutri
Dotata di piedi regolabili, può essere disposta a parete o ad isola
Funzionamento a gas metano o liquido; in dotazione ugelli intercambiabili
Piano stampato con invaso antitraboccamento di liquidi
Accostabile ad altre apparecchiature attraverso appositi giunti coprifuga
Bruciatori di elevata potenza dotati di termocoppia di sicurezza
Accensione piezoelettrica per ogni bruciatore
Robuste griglie in ghisa smaltata nero opaco

SPECIFICATIONS

Made of stainless steel
It can be placed on a counter or installed on a neutral base
Equipped with adjustable feet. It can be positioned by the wall or combined with other appliances as a central island.
Natural gas or LPG functioning; interchangeable nozzles are provided
Pressed top with raised edges to prevent liquids from spilling over
It can be matched with other appliances by means of special joint elements
Powerful burners equipped with safety thermocouple
Piezoelectric ignition for each burner
Sturdy enamelled cast iron grids

Disposizioni potenze sul piano

Power levels distribution on the top

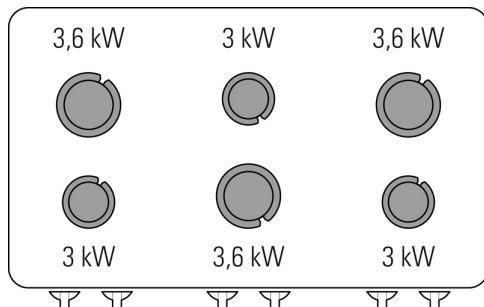

Information shown is provided only as a guide. The company reserves the right to modify these data without notifying anytime.

La validità dei dati riportati è indicativa. L'azienda si riserva il diritto di apportare, in qualsiasi momento, variazioni anche senza preavviso.



TECNOINOX S.r.l. - via Torricelli 1 - 33080 Porcia PN - Italy
tel.: +39.0434.920110 - fax: +39.0434.920422
www.tecnoinox.it - tecnoinox@tecnoinox.it



TECNOINOX



DATI TECNICI - TECHNICAL SHEET

	U.M.	
Total Power	kW	19,8
Gas Power	kW	19,8
Open Burners Power	n°x kW	3x3 + 3x3,6
Top Power	kW	19,8
Natural Gas Consumption	m³/h	2,09
Number of Burners	n°	6
Pan Holders		Ghisa Smalto RAAF-RAAF Enam. Cast Iron
CE Certificate Nr. (Gas Appliance)		CE-0085AQ1145
Gas Supply Height from Ground/Position		Fondo-Bottom
Gas Connection Diameter		1/2"G EN10226-1
	mm	0
	mm	1005
	mm	-100
	mm	51
		3
Width	cm	105
Depth	cm	60
Height	cm	30
Packaging Width	cm	111,0
Packaging Depth	cm	71,0
Packaging Height	cm	53,0
Net Weight	kg	29,5000
Gross Weight	kg	40,0000
Volume	m³	0,4200
S.H. Codes		84198180
Maximum weight for stacking	kg	500
Parcel Rotation Index		Orizzontale
Testing Sequence		90001
		173,174,177