



CARATTERISTICHE TECNICHE

Costruito in acciaio inox

Dotata di piedi regolabili, può essere disposta a parete o ad isola

Vano attrezzabile con cassetti, porte o guide per recipienti GN

Funzionamento a gas metano o liquido; in dotazione ugelli intercambiabili

Cassetti recupero residui posti al di sotto dei bruciatori dei fuochi aperti

Comandi e componenti facilmente accessibili rimuovendo il cruscotto

Rubinetti valvolati

Bruciatori a gas in ghisa smaltata vetrificata, dotati di fiamma pilota e termocoppia di sicurezza

Doppia corona sui bruciatori da 7,2 kW

SPECIFICATIONS

Made of stainless steel

Equipped with adjustable feet. It can be positioned by the wall or combined with other appliances as a central island.

The base unit can be equipped with drawers, doors or runners for GN containers

Natural gas or LPG functioning; interchangeable nozzles are provided

Residue collection drawer positioned underneath the burners

Easy to reach controls and units thanks to the removable front panel


Safety gas valves

Gas burners made of vitreous enamelled cast iron equipped with pilot flame and safety thermocouple

7,2 kW burners featuring double crown

Disposizioni potenze sul piano

Power levels distribution on the top

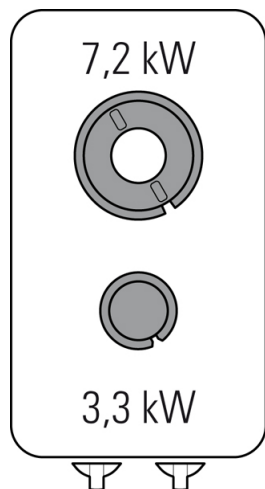

Information shown is provided only as a guide. The company reserves the right to modify these data without notifying anytime.

La validità dei dati riportati è indicativa. L'azienda si riserva il diritto di apportare, in qualsiasi momento, variazioni anche senza preavviso.



TECNOINOX S.r.l. - via Torricelli 1 - 33080 Porcia PN - Italy
tel.: +39.0434.920110 - fax: +39.0434.920422
www.tecnoinox.it - tecnoinox@tecnoinox.it





DATI TECNICI - TECHNICAL SHEET

	U.M.	
Total Power	kW	10,5
Gas Power	kW	10,5
Open Burners Power	n°x kW	1x3,3 + 1x7,2
Top Power	kW	10,5
Natural Gas Consumption	m³/h	1,11
Cabinet inner dimensions (WxDxH)	cm	33x57,4x39,5
Number of Burners	n°	2
Pan Holders		Ghisa Smalto RAAF-RAAF Enam. Cast Iron
CE Certificate Nr. (Gas Appliance)		CE-0085BO0091
Gas Connection Diameter		1/2"G EN10226-1
	mm	660
	mm	366
	mm	-63
	mm	155
	mm	155/250
		3
Width	cm	40
Depth	cm	70
Height	cm	90
Packaging Width	cm	81,0
Packaging Depth	cm	47,0
Packaging Height	cm	114,0
Net Weight	kg	35,0000
Gross Weight	kg	48,0000
Volume	m³	0,4300