




CARATTERISTICHE TECNICHE

- Costruito in acciaio inox
- Funzionamento a gas metano o liquido; in dotazione ugelli intercambiabili
- Comandi e componenti facilmente accessibili rimuovendo il cruscotto
- Rubinetti valvolati
- Piastra in ghisa levigata composta da 2 semipiastrine scomponibili ad anello centrale esportabile
- Bruciatore in acciaio sotto la piastra, accensione piezoelettrica
- Guide portateglie e suola forno smaltate e rimovibili
- Piastra in materiale indeformabile a prolungato mantenimento del calore

SPECIFICATIONS

- Made of stainless steel
- Natural gas or LPG functioning; interchangeable nozzles are provided
- Easy to reach controls and units thanks to the removable front panel
- Safety gas valves
- Smooth cast iron plate, 2 modular half-plates and removable central ring
- Steel burner placed under the plate. Piezoelectric ignition
- Bottom and runners for backing trays are enamelled and removable
- Plate made of non-deformable material for guaranteed extended heat

Disposizioni potenze sul piano
Power levels distribution on the top

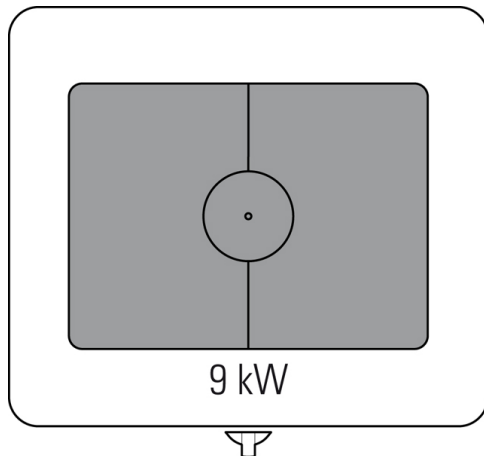

Information shown is provided only as a guide. The company reserves the right to modify these data without notifying anytime.
La validità dei dati riportati è indicativa. L'azienda si riserva il diritto di apportare, in qualsiasi momento, variazioni anche senza preavviso.



TECNOINOX S.r.l. - via Torricelli 1 - 33080 Porcia PN - Italy
tel.: +39.0434.920110 - fax: +39.0434.920422
www.tecnoinox.it - tecnoinox@tecnoinox.it





DATI TECNICI - TECHNICAL SHEET

	U.M.	
Total Power	kW	16
Gas Power	kW	16
Oven Power	kW	7
Top Power	kW	9
Heating Plate Power	n°x kW	1x9
Trays capacity	n°x	4xGN2/1
Natural Gas Consumption	m³/h	1,69
Oven Chamber Dimensions (WxDxH)	cm	57,5x65x30
Oven dimension		GN2/1
Plate Dimension	cm	74,2x55,8
Runners	n°	4
Number of Burners	n°	1(piastra)-1(plate)
Distance between shelves	cm	6
Oven Temperature Range	°C	150÷290
Oven Version		Statico-Static
Plate Type		Ghisa-Cast Iron
Heating Areas	n°	1
CE Certificate Nr. (Gas Appliance)		CE-0085BO0092
Gas Supply Height from Ground/Position		Fondo-Bottom
	mm	0
	mm	650
	mm	-580
Gas Connection Diameter		1/2"G EN10226-1
	mm	0
	mm	766
	mm	-412
	mm	155
	mm	155/250
		3
Width	cm	80
Depth	cm	70
Height	cm	90
Packaging Width	cm	85,0
Packaging Depth	cm	82,0
Packaging Height	cm	114,0
Net Weight	kg	118,0000

DATI TECNICI - TECHNICAL SHEET

	U.M.	
Gross Weight	kg	140,0000
Volume	m ³	0,7900
S.H. Codes		84198180
Maximum weight for s tacking	kg	500
Parcel Rotation Index		Orizzontale
Testing Sequence		90001
		173,174,177,49