

PIANO COTTURA ELETTRICO 4 PIASTRE TONDE SU VANO APERTO

4 ROUND HOT PLATES FREESTANDING ELECTRIC BOILING TOP



CARATTERISTICHE TECNICHE

Costruito in acciaio inox

Dotata di piedi regolabili, può essere disposta a parete o ad isola

Vano attrezzabile con cassetti, porte o guide per recipienti GN

Comandi e componenti facilmente accessibili rimuovendo il cruscotto

Comandi di riscaldamento e controllo separati per ciascuna piastra

Limitatore di temperatura interno alle piastre per evitare surriscaldamenti e ridurre il consumo energetico

Piastre elettriche di elevata potenza fissate ermeticamente al piano

Selettori di potenza a 7 posizioni

Lampade spia indicanti le piastre accese

SPECIFICATIONS

Made of stainless steel

Equipped with adjustable feet. It can be positioned by the wall or combined with other appliances as a central island.

The base unit can be equipped with drawers, doors or runners for GN containers

Easy to reach controls and units thanks to the removable front panel

Independent heating controls for each plate

Plate-internal temperature limiter to prevent overheating and curb energy consumption


Powerful electric hot plates hermetically sealed to the top

7-position power switches

Signal lamps showing which hot plates are on

Disposizioni potenze sul piano

Power levels distribution on the top

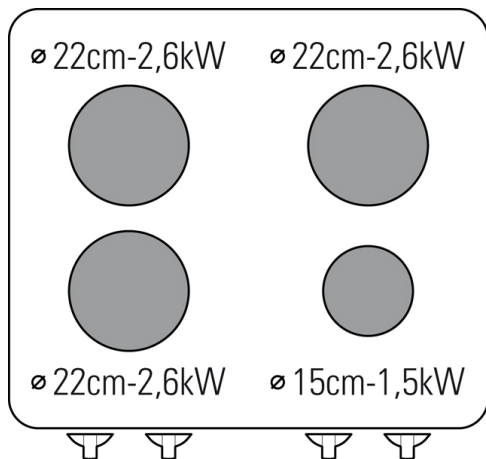

Information shown is provided only as a guide. The company reserves the right to modify these data without notifying anytime.

La validità dei dati riportati è indicativa. L'azienda si riserva il diritto di apportare, in qualsiasi momento, variazioni anche senza preavviso.



TECNOINOX S.r.l. - via Torricelli 1 - 33080 Porcia PN - Italy
tel.: +39.0434.920110 - fax: +39.0434.920422
www.tecnoinox.it - tecnoinox@tecnoinox.it





DATI TECNICI - TECHNICAL SHEET

	U.M.	
Total Power	kW	9,3
EL Power	kW	9,3
Frequency	Hz	50-60
Voltage	V	400 3N ~
Top Power	kW	9,3
Cooking Zones Power	n°x kW	3x2,6 + 1x1,5
Heating Plate Dimensions	cm	3xØ22 + 1xØ15
Cabinet inner dimensions (WxDxH)	cm	73x57,4x39,5
Number of Cooking zones	n°	4
Supply cable Min. Cross Section	n° x mm²	5 x 2,5
Cable Type		H07 RN-F
Electr. Supply Height from Ground/Position		66cm
	mm	660
	mm	721
	mm	-63
	mm	155
	mm	155/250
		3
Width	cm	80
Depth	cm	70
Height	cm	90
Packaging Width	cm	85,0
Packaging Depth	cm	82,0
Packaging Height	cm	114,0
Net Weight	kg	48,5000
Gross Weight	kg	66,0000
Volume	m³	0,7900
S.H. Codes		84198180
Maximum weight for stacking	kg	500
Parcel Rotation Index		Orizzontale
Testing Sequence		40011
		173,174,176