

716018

PCC8FE7

**PIANO COTTURA ELETTRICO IN VETROCERAMICA 4
ZONE RISCALDANTI SU VANO APERTO**

**4 HOT ZONES FREESTANDING GLASS CERAMIC COOK
TOP**



CARATTERISTICHE TECNICHE

Costruito in acciaio inox

Dotata di piedi regolabili, può essere disposta a parete o ad isola

Vano attrezzabile con cassetti, porte o guide per recipienti GN

Comandi e componenti facilmente accessibili rimuovendo il cruscotto

Piano in vetroceramica sigillato ermeticamente

Resistenze di elevata potenza sotto il piano in vetroceramica

Lampade spia indicanti le zone in funzione

Selettori di potenza a 7 posizioni

SPECIFICATIONS

Made of stainless steel

Equipped with adjustable feet. It can be positioned by the wall or combined with other appliances as a central island.

The base unit can be equipped with drawers, doors or runners for GN containers

Easy to reach controls and units thanks to the removable front panel

Hermetically sealed glass ceramic top


High power heating elements under the glass ceramic

Signal lamps showing the working heating zones

7-position power switches

Disposizioni potenze sul piano

Power levels distribution on the top

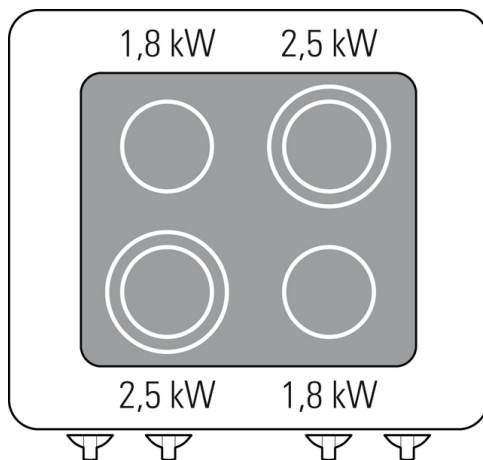

Information shown is provided only as a guide. The company reserves the right to modify these data without notifying anytime.

La validità dei dati riportati è indicativa. L'azienda si riserva il diritto di apportare, in qualsiasi momento, variazioni anche senza preavviso.



TECNOINOX S.r.l. - via Torricelli 1 - 33080 Porcia PN - Italy
tel.: +39.0434.920110 - fax: +39.0434.920422
www.tecnoinox.it - tecnoinox@tecnoinox.it



TECNOINOX



DATI TECNICI - TECHNICAL SHEET

	U.M.	
Total Power	kW	8,6
EL Power	kW	8,6
Frequency	Hz	50-60
Voltage	V	400 3N ~
Top Power	kW	8,6
Cooking Zones Power	n°x kW	2x1,8 + 2x2,5
Cabinet inner dimensions (WxDxH)	cm	73x57,4x39,5
Double Zones Heating Elements	n°	2
Number of Cooking zones	n°	4
Supply cable Min. Cross Section	n° x mm²	5 x 2,5
Cable Type		H07 RN-F
Heating Areas	n°	4
Electr. Supply Height from Ground/Position		66cm
	mm	660
	mm	721
	mm	-63
	mm	155
	mm	155/250
		3
Width	cm	80
Depth	cm	70
Height	cm	90
Packaging Width	cm	85,0
Packaging Depth	cm	82,0
Packaging Height	cm	114,0
Net Weight	kg	38,5000
Gross Weight	kg	56,0000
Volume	m³	0,7900
S.H. Codes		84198180
Maximum weight for stacking	kg	500
Parcel Rotation Index		Orizzontale
Testing Sequence		40007
		173,177,176,53