

716089

PPF8V7

CUCINA ELETTRICA "TUTTA PIASTRA" CON FORNO
ELETTRICO VENTILATO GN1/1

"SINGLE PLATE" ELECTRIC SOLID TOP RANGE WITH
GN1/1 FAN ASSISTED ELECTRIC OVEN




CARATTERISTICHE TECNICHE

- Costruito in acciaio inox
- Dotata di piedi regolabili, può essere disposta a parete o ad isola
- Comandi e componenti facilmente accessibili rimuovendo il cruscotto
- Guide portateglie in acciaio inox rimovibili
- Lampade spia indicanti le zone in funzione
- Selettori di potenza a 7 posizioni

SPECIFICATIONS

- Made of stainless steel
- Equipped with adjustable feet. It can be positioned by the wall or combined with other appliances as a central island.
- Easy to reach controls and units thanks to the removable front panel
- Removable stainless steel runners for backing trays
- Signal lamps showing the working heating zones
- 7-position power switches

Disposizioni potenze sul piano
Power levels distribution on the top

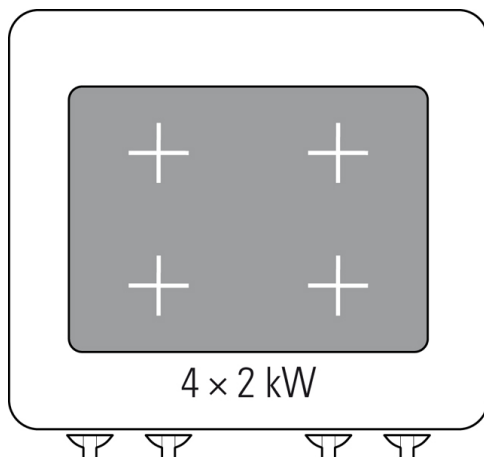

Information shown is provided only as a guide. The company reserves the right to modify these data without notifying anytime.
La validità dei dati riportati è indicativa. L'azienda si riserva il diritto di apportare, in qualsiasi momento, variazioni anche senza preavviso.



TECNOINOX S.r.l. - via Torricelli 1 - 33080 Porcia PN - Italy
tel.: +39.0434.920110 - fax: +39.0434.920422
www.tecnoinox.it - tecnoinox@tecnoinox.it



**CUCINA ELETTRICA "TUTTA PIASTRA" CON FORNO
ELETTRICO VENTILATO GN1/1**

"SINGLE PLATE" ELECTRIC SOLID TOP RANGE WITH
GN1/1 FAN ASSISTED ELECTRIC OVEN



DATI TECNICI - TECHNICAL SHEET

	U.M.	
Total Power	kW	13
EL Power	kW	13
Frequency	Hz	50-60
Voltage	V	400 3N ~
Oven Power	kW	5
Top Power	kW	8
Cooking Zones Power	n°x kW	4x2
Trays capacity	n°x	5xGN1/1
Oven Chamber Dimensions (WxDxH)	cm	57x51,5x30
Oven dimension		GN1/1
Plate Dimension	cm	76,3x58
Runners	n°	5
Number of Cooking zones	n°	4
Distance between shelves	cm	5
Oven Temperature Range	°C	60÷270
Supply cable Min. Cross Section	n° x mm²	5 x 2,5
Cable Type		H07 RN-F
Oven Version		Ventilato-Fan Assisted
Plate Type		Fe16Mo3
Heating Areas	n°	4
Electr. Supply Height from Ground/Position		Fondo-Bottom
	mm	0
	mm	650
	mm	-580
	mm	155
	mm	155/250
		3
Width	cm	80
Depth	cm	70
Height	cm	90
S.H. Codes		84198180
Maximum weight for stacking	kg	500
Parcel Rotation Index		Orizzontale
Testing Sequence		40013
		173,174,176,178,194