



CARATTERISTICHE TECNICHE

Costruito in acciaio inox

Piano di spessore 2 mm in acciaio inox AISI 304

Dotata di piedi regolabili, può essere disposta a parete o ad isola

Vano attrezzabile con cassette, porte o guide per recipienti GN

Funzionamento a gas metano o liquido; in dotazione ugelli intercambiabili

Cassetti recupero residui posti al di sotto dei bruciatori dei fuochi aperti

Comandi e componenti facilmente accessibili rimuovendo il cruscotto

Rubinetti valvolati

Bruciatori a gas in ghisa smaltata vetrificata, dotati di fiamma pilota e termocoppia di sicurezza

Doppia corona sui bruciatori da 9 kW

SPECIFICATIONS

Made of stainless steel

2-mm-thick top

Equipped with adjustable feet. It can be positioned by the wall or combined with other appliances as a central island.

The base unit can be equipped with drawers, doors or runners for GN containers

Natural gas or LPG functioning; interchangeable nozzles are provided

Residue collection drawer positioned underneath the burners

Easy to reach controls and units thanks to the removable front panel


Safety gas valves

Gas burners made of vitreous enamelled cast iron equipped with pilot flame and safety thermocouple

9kW burners featuring double crown

Disposizioni potenze sul piano

Power levels distribution on the top

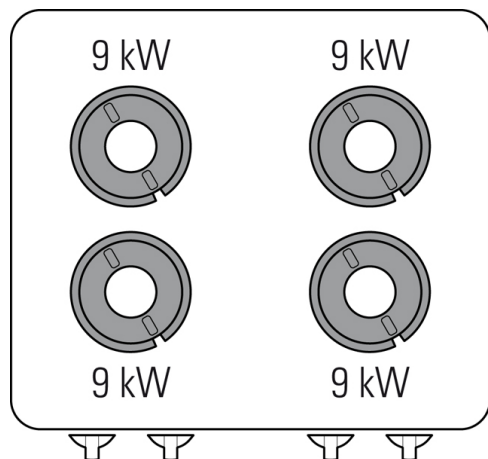

Information shown is provided only as a guide. The company reserves the right to modify these data without notifying anytime.

La validità dei dati riportati è indicativa. L'azienda si riserva il diritto di apportare, in qualsiasi momento, variazioni anche senza preavviso.



TECNOINOX S.r.l. - via Torricelli 1 - 33080 Porcia PN - Italy
tel.: +39.0434.920110 - fax: +39.0434.920422
www.tecnoinox.it - tecnoinox@tecnoinox.it



TECNOINOX



DATI TECNICI - TECHNICAL SHEET

	U.M.	
Total Power	kW	36
Gas Power	kW	36
Open Burners Power	n°x kW	4x9
Top Power	kW	36
Natural Gas Consumption	m³/h	3,8
Cabinet inner dimensions (WxDxH)	cm	77x76,1x39,5
Number of Burners	n°	4
Pan Holders		Ghisa Smalto RAAF-RAAF Enam. Cast Iron
CE Certificate Nr. (Gas Appliance)		CE-0085BQ0326
Gas Supply Height from Ground/Position		64cm
Gas Connection Diameter		3/4"G EN10226-1
	mm	484
	mm	766
	mm	-75
	mm	133
	mm	133/195
		3
Width	cm	80
Depth	cm	90
Height	cm	90
Packaging Width	cm	86,0
Packaging Depth	cm	100,0
Packaging Height	cm	116,0
Net Weight	kg	93,0000
Gross Weight	kg	117,0000
Volume	m³	0,9900
S.H. Codes		84198180
Maximum weight for stacking	kg	500
Parcel Rotation Index		Orizzontale
Testing Sequence		90001
		173,174,177