

TECNO74

716015

PCC4E7

PIANO COTTURA ELETTRICO IN VETROCERAMICA 2
ZONE RISCALDANTI

2 HOT ZONES GLASS CERAMIC BOILING TOP



CARATTERISTICHE TECNICHE

Costruito in acciaio inox

Dotata di piedini regolabili, utilizzabile su banco o abbinabile a vani neutri

Comandi e componenti facilmente accessibili rimuovendo il cruscotto

Piano in vetroceramica sigillato ermeticamente

Resistenze di elevata potenza sotto il piano in vetroceramica

Lampade spia indicanti le zone in funzione

Selettori di potenza a 7 posizioni

SPECIFICATIONS

Made of stainless steel

Provided with adjustable feet and can be used separately on a counter or placed on a neutral base

Easy to reach controls and units thanks to the removable front panel

Hermetically sealed glass ceramic top


High power heating elements under the glass ceramic

Signal lamps showing the working heating zones

7-position power switches

Disposizioni potenze sul piano

Power levels distribution on the top

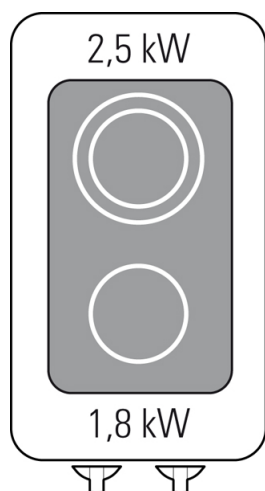

Information shown is provided only as a guide. The company reserves the right to modify these data without notifying anytime.

La validità dei dati riportati è indicativa. L'azienda si riserva il diritto di apportare, in qualsiasi momento, variazioni anche senza preavviso.



TECNOINOX S.r.l. - via Torricelli 1 - 33080 Porcia PN - Italy
tel.: +39.0434.920110 - fax: +39.0434.920422
www.tecnoinox.it - tecnoinox@tecnoinox.it





DATI TECNICI - TECHNICAL SHEET

| | U.M. | |
|--|----------|----------------|
| Total Power | kW | 4,3 |
| EL Power | kW | 4,3 |
| Frequency | Hz | 50-60 |
| Voltage | V | 400 2N ~ |
| Top Power | kW | 4,3 |
| Cooking Zones Power | n°x kW | 1x1,8 + 1x2,5 |
| Double Zones Heating Elements | n° | 1 |
| Number of Cooking zones | n° | 2 |
| Supply cable Min. Cross Section | n° x mm² | 5 x 1,5 |
| Cable Type | | H07 RN-F |
| Heating Areas | n° | 2 |
| Electr. Supply Height from Ground/Position | | 5cm |
| | mm | 35 |
| | mm | 361 |
| | mm | -63 |
| | mm | 15 |
| | mm | 15/25 |
| | | 3 |
| Width | cm | 40 |
| Depth | cm | 70 |
| Height | cm | 28 |
| Packaging Width | cm | 81,0 |
| Packaging Depth | cm | 47,0 |
| Packaging Height | cm | 54,0 |
| Net Weight | kg | 16,6000 |
| Gross Weight | kg | 22,0000 |
| Volume | m³ | 0,2000 |
| S.H. Codes | | 84198180 |
| Maximum weight for stacking | kg | 500 |
| Parcel Rotation Index | | Orizzontale |
| Testing Sequence | | 30003 |
| | | 173,177,176,53 |